


VAV-SRC CO₂

HDH-PU-R-N koblings skjema:




Gul = G
 Brun = G0
 Blå = Y4

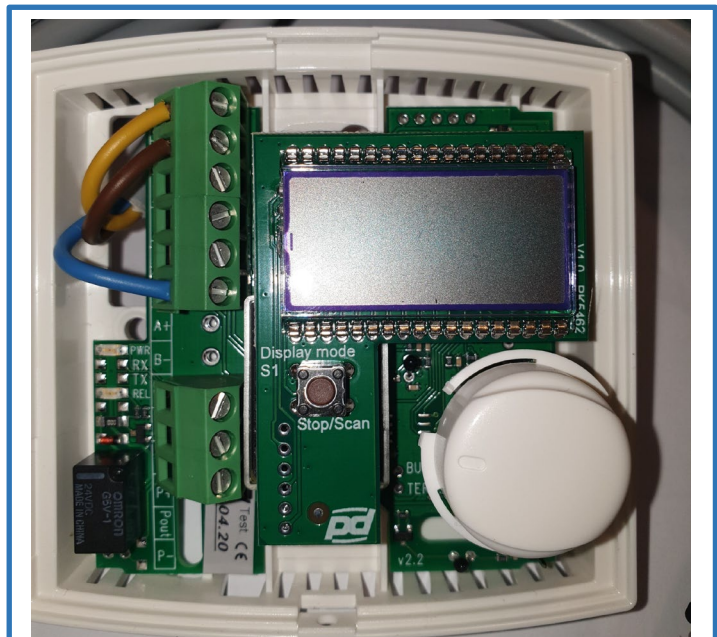

VAV-SRC Temp

HLS-33 koblings skjema:

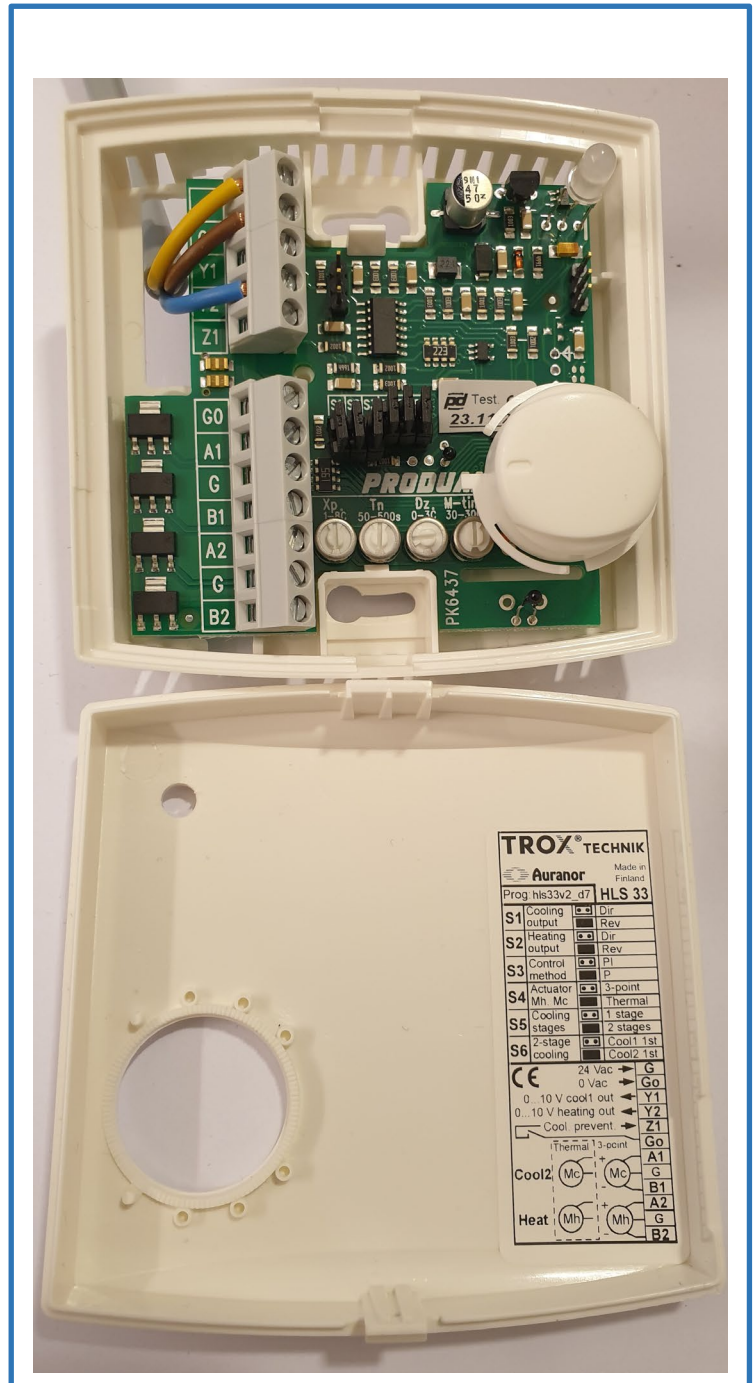

Gul = G
 Brun = G0
 Blå = Y2

TROX [®] TECHNIK	
Auranor	
Made in Finland	
Prog: hls33v2_d7	HLS 33
S1 Cooling output	<input type="checkbox"/> Dir <input type="checkbox"/> Rev
S2 Heating output	<input type="checkbox"/> Dir <input type="checkbox"/> Rev
S3 Control method	<input type="checkbox"/> PI <input type="checkbox"/> P
S4 Actuator	<input type="checkbox"/> 3-point <input type="checkbox"/> Thermal
S5 Cooling stages	<input type="checkbox"/> 1 stage <input type="checkbox"/> 2 stages
S6 2-stage cooling	<input type="checkbox"/> Cool1 1st <input type="checkbox"/> Cool2 1st
CE	24 Vac → G 0 Vac → Go
	0-10 V cool1 out → Y1
	0-10 V heating out → Y2
	Cool prevent → Z1
	Go → G
	A1 → A1
	G → G
	B1 → B1
	A2 → A2
	G → G
	B2 → B2
Cool2	(Mc) → (Mc)
Heat	(Mh) → (Mh)

VAV-SRC PIR

IR24-P koblings skjema:



Gul = 24V

Brun = G0

Blå = NO

Lask mellom
24V og COM

*følger med

